

SC-600HM

METAL CORED WIRE FOR HARDFACING

HYUNDAI WELDING CO., LTD.



SC-600HM

❖ Specification

-

❖ Applications

For cutting tools, shear blades, rollers for cold rolling mills

❖ Characteristics on Usage

SC-600HM is a metal cored wire without slag for hardfacing application with Ar-CO₂ mixed gas. It is high resistance to cracking and toughness.

❖ Note on Usage

Use with 80%Ar + 20%CO₂ shielding gas.

❖ Packing


Dia.(mm)	1.2	1.6
Spool (kg)	5 / 15	



SC-600HM

Mechanical Properties & Chemical Composition of All Weld Metal

❖ Welding Conditions

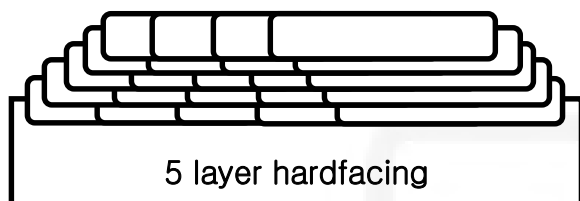

Diameter(mm)	: 1.2/1.6mm
Shielding Gas	: 80%Ar+20%CO ₂
Flow Rate(ℓ /min.)	: 20
Amp./ Volt.	: 260~300/30~31
Stick-Out(mm)	: 20
Pre-Heat(℃)	: 150~200
Interpass Temp.(℃)	: ≥250
Polarity	: DC(+)

❖ Chemical Analysis of All weld metal(wt%)



Consumable	Shielding Gas	Chemical Composition (%)						
		C	Si	Mn	P	S	Cr	Mo
SC-600HM (1.2mm)	80%Ar+ 20%CO ₂	0.48	0.37	1.57	0.012	0.009	6.37	0.35
SC-600HM (1.6mm)		0.42	0.30	1.38	0.012	0.009	6.25	0.34

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



Mechanical Properties & Chemical Composition of All Weld Metal

❖ Hardness test of All weld metal(HRc)

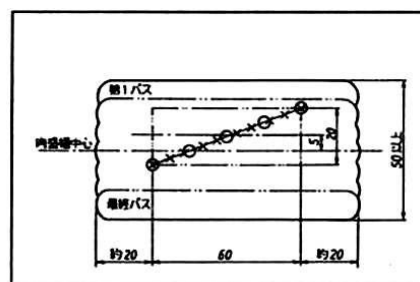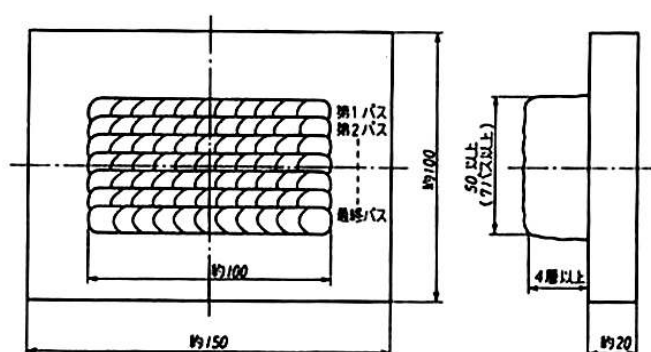

×印：ビッカース硬さ又はロックウェル硬さ測定位置（等間隔に10点測定）
○印：ブリネル硬さ測定位置（等間隔に5点測定）

[Method of Hardness Test for Deposited Metal(JIS Z3114 -1990)]

Consumable	Hardness(HRc)										Avg.
SC-600HM(1.2mm)	58	58	59	59	59	59	60	60	61	62	59.5
SC-600HM(1.6mm)	58	59	59	59	60	61	61	62	62	62	60.3

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



Test Results

❖ Bead Appearance

SC-600HM(1.2mm)	Horizontal Fillet, Base : Mild Steel, 80%Ar+20%CO ₂ (260A/30V)	
	Flat(Bead on plate), Base : Mild Steel, 80%Ar+20%CO ₂ (260A/30V)	
	Horizontal Fillet, Base : Mild Steel, 80%Ar+20%CO ₂ (300A/31V)	
	Flat(Bead on plate), Base : Mild Steel, 80%Ar+20%CO ₂ (300A/31V)	
SC-600HM(1.6mm)	Horizontal Fillet, Base : Mild Steel, 80%Ar+20%CO ₂ (260A/30V)	
	Flat(Bead on plate), Base : Mild Steel, 80%Ar+20%CO ₂ (260A/30V)	
	Horizontal Fillet, Base : Mild Steel, 80%Ar+20%CO ₂ (300A/31V)	
	Flat(Bead on plate), Base : Mild Steel, 80%Ar+20%CO ₂ (300A/31V)	

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.